


38.05
SDM-D

Doppelseitige Nadel mit Holzgewinde und metrischem Gewinde mit Sechskantprägung

ANFRAGE

+48 58 55 40 410

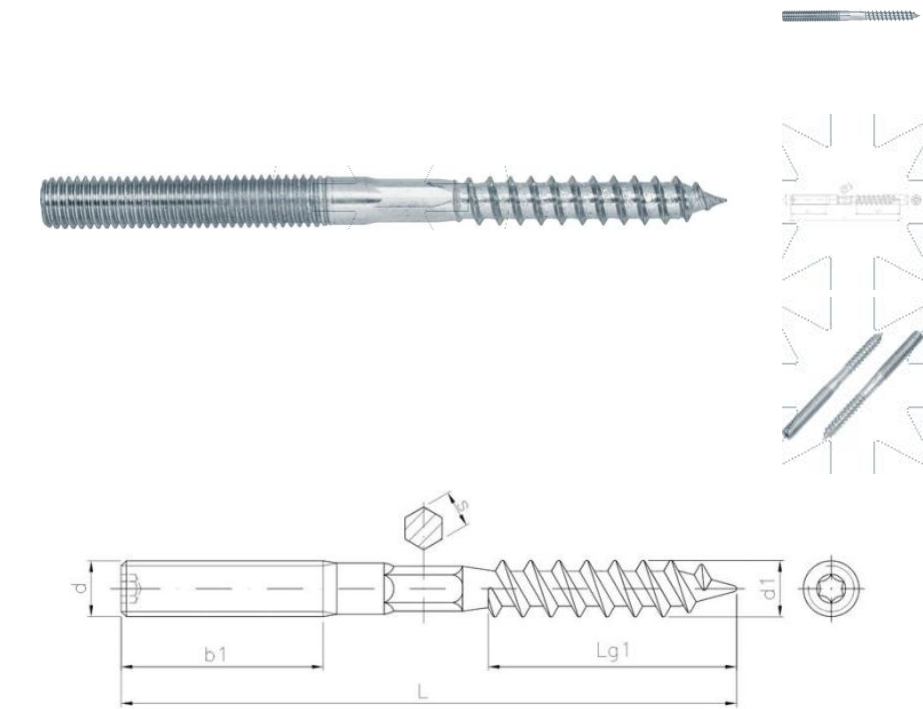

Güte (Standard):

Beschichtung (Standard):

4.8

B
WEISS
VERZINKT

Maße						
Material index	d	d1 [mm]	L [mm]	b1 [mm]	Lg1 [mm]	s [mm]
3805100100140TXBT	M10	10	140	59	59	8
3805100100120TXBT	M10	10	120	37	59	8
3805100100100TXBT	M10	10	100	30	59	8
3805100100080TXBT	M10	10	80	19	49	8
3805100100070TXBT	M10	10	70	19	39	8
3805080080300TXBT	M8	8	300	50	59	6
3805080080300BT	M8	8	300	50	59	6
3805080080250TXBT	M8	8	250	50	59	6
3805080080200TXBT	M8	8	200	50	59	6
3805080080180TXBT	M8	8	180	50	59	6
3805080080160TXBT	M8	8	160	50	59	6
3805080080150TXBT	M8	8	150	50	59	6
3805080080140TXBT	M8	8	140	50	59	6
3805080080120TXBT	M8	8	120	50	59	6
3805080080100TXBT	M8	8	100	25	59	6
3805080080090TXBT	M8	8	90	25	49	6
3805080080080TXBT	M8	8	80	25	39	6
3805080080070TXBT	M8	8	70	15	44	6
3805080080060TXBT	M8	8	60	15	30	6

Material index	d	d1 [mm]	L [mm]	b1 [mm]	Lg1 [mm]	s [mm]
3805080080050TXBT	M8	8	50	15	30	6