
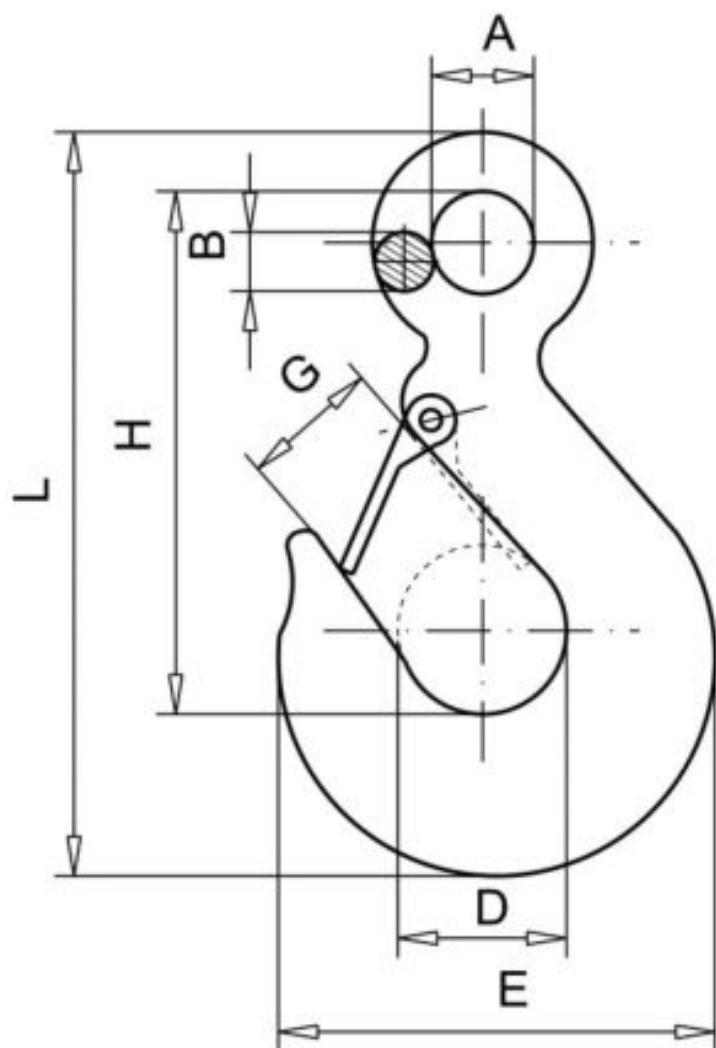





**Standards:**DIN 689~, DIN 7540~  
~ISO 1677-2

Maße

| Material index | Obciążenie znamionowe [kg] | A [mm] | B [mm] | D [mm] | E [mm] | G [mm] | H [mm] | L [mm] | Farbe |
|----------------|----------------------------|--------|--------|--------|--------|--------|--------|--------|-------|
| 63260250OCS    | 250                        | 13     | 7.5    | 23     | 54     | 15     | 64     | 89     | Grau  |
| 63260500OCS    | 500                        | 16     | 10     | 30.5   | 72     | 22     | 83.5   | 118    | Grau  |
| 63260750MALS   | 750                        | 19     |        |        |        | 22     | 81.5   | 110    | Rot   |
| 63261500MALS   | 1500                       | 27     | 13     | 35     | 93     | 23     | 103    | 142    | Rot   |
| 63261000OCS    | 1000                       | 20     | 13.5   | 40     | 98     | 25     | 114    | 162    | Grau  |
| 63261000MALS   | 1000                       | 20     | 13.5   | 40     | 98     | 25     | 114    | 162    | Rot   |
| 63263000MALS   | 3000                       | 39     | 19     | 46     | 125    | 26.5   | 145    | 204    | Rot   |
| 63262000MALS   | 2000                       | 31     |        |        |        | 28     | 119    | 162.5  | Rot   |
| 63261600OCS    | 1600                       | 26     | 17     | 47     | 116.5  | 31     | 136    | 190    | Grau  |
| 63265000MALS   | 5000                       | 51     |        |        |        | 42     | 187    | 256    | Rot   |