


Standards:

DIN 605, DIN 608  
PN-M 82402

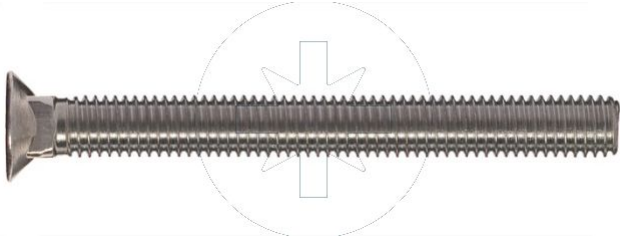

Güte (Standard):

4.8


Güte (Sonderausführung):

8.8

Beschichtung (Standard):



Beschichtung  
(Sonderausführung):

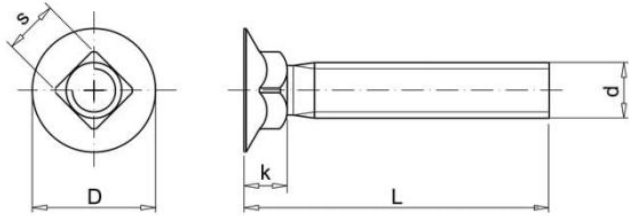

Maße

| Material index   | d   | L [mm] | D [mm] | k [mm] | s [mm] | das mechanische Eigenschaftsklasse | Norma DIN |
|------------------|-----|--------|--------|--------|--------|------------------------------------|-----------|
| 1110120035SK     | M12 | 35     | 23.0   | 10.0   | 12.0   | 4.8                                | DIN 605   |
| 1110120030SK     | M12 | 30     | 23.0   | 10.0   | 12.0   | 4.8                                | DIN 605   |
| 1110120040SK     | M12 | 40     | 23.0   | 10.0   | 12.0   | 4.8                                | DIN 605   |
| 1110120045SK     | M12 | 45     | 23.0   | 10.0   | 12.0   | 4.8                                | DIN 605   |
| 1110120030D608SK | M12 | 30     | 23.0   | 10.0   | 12.0   | 4.8                                | DIN 608   |
| 1110120035D608SK | M12 | 35     | 23.0   | 10.0   | 12.0   | 4.8                                | DIN 608   |
| 1110120040D608SK | M12 | 40     | 23.0   | 10.0   | 12.0   | 4.8                                | DIN 608   |
| 1110120045D608SK | M12 | 45     | 23.0   | 10.0   | 12.0   | 4.8                                | DIN 608   |
| 1110100035SK     | M10 | 35     | 18.0   | 8.0    | 10.0   | 4.8                                | DIN 605   |
| 1110100045SK     | M10 | 45     | 18.0   | 8.0    | 10.0   | 4.8                                | DIN 605   |
| 1110100030SK     | M10 | 30     | 18.0   | 8.0    | 10.0   | 4.8                                | DIN 605   |
| 1110100025SK     | M10 | 25     | 18.0   | 8.0    | 10.0   | 4.8                                | DIN 605   |
| 1110100040SK     | M10 | 40     | 18.0   | 8.0    | 10.0   | 4.8                                | DIN 605   |
| 1110100025D608SK | M10 | 25     | 18.0   | 8.0    | 10.0   | 4.8                                | DIN 608   |
| 1110100030D608SK | M10 | 30     | 18.0   | 8.0    | 10.0   | 4.8                                | DIN 608   |
| 1110100035D608SK | M10 | 35     | 18.0   | 8.0    | 10.0   | 4.8                                | DIN 608   |
| 1110100040D608SK | M10 | 40     | 18.0   | 8.0    | 10.0   | 4.8                                | DIN 608   |
| 1110100045D608SK | M10 | 45     | 18.0   | 8.0    | 10.0   | 4.8                                | DIN 608   |