


ANFRAGE

+48 58 55 40 410

Standards:

DIN 7504-N
ISO 15481, ISO 2702

Beschichtung (Standard):

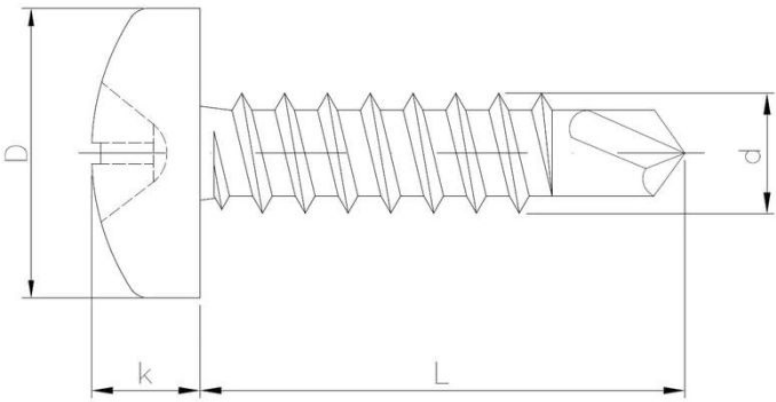

Maße

Material index	d [mm]	L [mm]	D [mm]	k [mm]	Antrieb	Art der Beschichtung
23120290130PHBWT	2.9	13	5.5	2.2	PH	B (Weiss verzinkt)
23120290160PHBWT	2.9	16	5.5	2.2	PH	B (Weiss verzinkt)
23120350160PHBWT	3.5	16	6.8	2.6	PH	B (Weiss verzinkt)
23120350190PHBWT	3.5	19	6.8	2.6	PH	B (Weiss verzinkt)
23120350095PHBWT	3.5	9.5	6.8	2.6	PH	B (Weiss verzinkt)
23120350095PHCWT	3.5	9.5	6.8	2.6	PH	C (Schwarz verzinkt)
23120350130PHBWT	3.5	13	6.8	2.6	PH	B (Weiss verzinkt)
23120390190PHBWT	3.9	19	7.5	2.8	PH	B (Weiss verzinkt)
23120390130PHBWT	3.9	13	7.5	2.8	PH	B (Weiss verzinkt)
23120390250PHBWT	3.9	25	7.5	2.8	PH	B (Weiss verzinkt)
23120390095PHBWT	3.9	9.5	7.5	2.8	PH	B (Weiss verzinkt)
23120390160PHBWT	3.9	16	7.5	2.8	PH	B (Weiss verzinkt)
23120390095PHCWT	3.9	9.5	7.5	2.8	PH	C (Schwarz verzinkt)
23120420190PHBWT	4.2	19	8.1	3.1	PH	B (Weiss verzinkt)
23120420220PHBWT	4.2	22	8.1	3.1	PH	B (Weiss verzinkt)
23120420130PHBWT	4.2	13	8.1	3.1	PH	B (Weiss verzinkt)

Material index	d [mm]	L [mm]	D [mm]	k [mm]	Antrieb	Art der Beschichtung
23120420320PHBWT	4.2	32	8.1	3.1	PH	B (Weiss verzinkt)
23120420160PHBWT	4.2	16	8.1	3.1	PH	B (Weiss verzinkt)
23120420250PHBWT	4.2	25	8.1	3.1	PH	B (Weiss verzinkt)
23120420160I4BWT	4.2	16	8.1	3.1	PH	B (Weiss verzinkt)
23120480320PHBWT	4.8	32	9.5	3.6	PH	B (Weiss verzinkt)
23120480190PHBWT	4.8	19	9.5	3.6	PH	B (Weiss verzinkt)
23120480250PHBWT	4.8	25	9.5	3.6	PH	B (Weiss verzinkt)
23120480380PHBWT	4.8	38	9.5	3.6	PH	B (Weiss verzinkt)
23120480500PHBWT	4.8	50	9.5	3.6	PH	B (Weiss verzinkt)
23120480160PHBWT	4.8	16	9.5	3.6	PH	B (Weiss verzinkt)
23120480130PHBWT	4.8	13	9.5	3.6	PH	B (Weiss verzinkt)
23120480220PHBWT	4.8	22	9.5	3.6	PH	B (Weiss verzinkt)