



I15.01 Sechskantmuttern

N6K

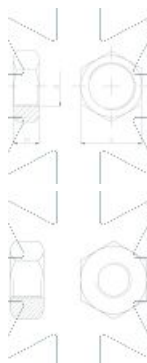

Materiale:

A2 A4

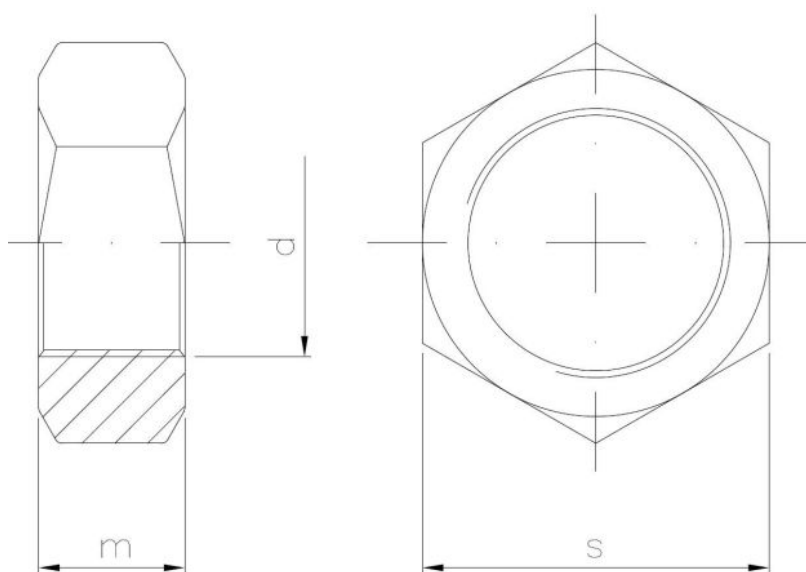

Maße

Material index	d	s [mm]	m [mm]	Materialien
I1501040A2D934T	M4	7.0	3.2	A2 (Edelstahl)
I1501040A4D934T	M4	7.0	3.2	A4 (säurebeständiger Stahl)
I1501050A2D934T	M5	8.0	4.0	A2 (Edelstahl)
I1501050A4D934T	M5	8.0	4.0	A4 (säurebeständiger Stahl)
I1501060A2D934T	M6	10.0	5.0	A2 (Edelstahl)
I1501060A4D934T	M6	10.0	5.0	A4 (säurebeständiger Stahl)
I1501080A2D934T	M8	13.0	6.5	A2 (Edelstahl)
I1501080A4D934T	M8	13.0	6.5	A4 (säurebeständiger Stahl)
I1501100A2D934T	M10	17.0	8.0	A2 (Edelstahl)
I1501100A4D934S	M10	17.0	8.0	A4 (säurebeständiger Stahl)
I1501120A2D934T	M12	19.0	10.0	A2 (Edelstahl)
I1501120A4D934S	M12	19.0	10.0	A4 (säurebeständiger Stahl)
I1501160A2D934T	M16	24.0	13.0	A2 (Edelstahl)
I1501160A4D934S	M16	24.0	13.0	A4 (säurebeständiger Stahl)

ANFRAGE

+48 58 55 40 410

Standards:

DIN 934
ISO 4032
PN-M 82114

Material index	d	s [mm]	m [mm]	Materialien
I1501200A2D934S	M20	30.0	16.0	A2 (Edelstahl)
I1501240A2D934S	M24	36.0	19.0	A2 (Edelstahl)